

Description

The FI-EMP8 monitor is an electric remote-controlled monitor designed for installation in fixed systems and ships.

The FI-EMP8 is a welded monitor that can be manufactured in stainless steel. It has a nominal diameter of 8 inches and supports a recommended maximum flow rate of 30.000 Lpm. The reaction force generated by the monitor depends on the operating flow and pressure parameters and can be calculated using the following formula:

$$(N) = 0.233 \times Q \text{ (Lpm)} \times \sqrt{p \text{ (bar)}}.$$

The FI-EMP8 electric monitor can be equipped with various electric actuators, either DC or AC, according to the specific requirements of the system and the customer. Manual emergency operation is always guaranteed. Depending on the sensors installed, the FI-EMP8 monitor can either be an electromechanical or a fully programmable unit, capable of performing automatic oscillation cycles within predefined zones of the system. The monitor is available in a safe area configuration or ATEX certified for Zone 1, 2, 21, 22.

The FI-EMP8 monitor can be equipped with nozzles and water or foam branchpipes.


Application

The electric monitor FI-EMP8 is used in a wide range of applications, including:

- Refineries and petrochemical plants
- Chemical and pharmaceutical facilities
- Industrial plants
- Ships and vessels

Use and Maintenance

For detailed installation, operation, and maintenance procedures, please refer to the FI-EMP8 operation and maintenance manual.

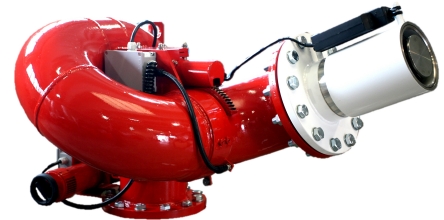

Certifications



Machine Directive 2006/42/CE

The FI-EMP8 monitor, thanks to its motorized drive system with gearmotors, complies with the Machinery Directive 2006/42/EC and is therefore CE marked.

ATEX Directive 2014/34/UE


The FI-EMP8 monitor can be supplied (on request) with ATEX certification for installation in classified areas Zone 1, 2, 21, and 22. Technical dossier no. FIERRE-200024EX-FT-12000-00-01 FTC – Rev.3 is filed with the notified body Bureau Veritas.

Compatibility with fluorine free foams


The Fierre monitors are compatible with fluorine-free concentrates. For more detailed information, please contact the company.

Technical characteristics	
Material	Stainless steel (AISI 304 / 316)
Max. working pressure	16 bar
Max. recommended flow rate	30.000 lt/min
Inlet connection	Flanged 8" or 10", UNI PN 16 / ANSI / JIS
Outlet connection	Flanged 8"
Weight	130 kg for the safe area version; 140 kg for the ATEX version (weights may vary depending on the specific configuration and components)
Rotation	+170° -170° (may vary depending on the specific configuration)
Elevation	+80° -80° (may vary depending on the specific configuration)
Design temperature	-20° +40° (components available for different operating temperatures)
Electric actuators	AC actuators: 230 V / 50 Hz / 1Ph – 400 V / 50 Hz / 3Ph Different frequencies available on request. DC actuators: 24 V
IP protection grade	IP 66 for all configurations
Sensors	Electromechanical version: inductive or magnetic sensors Programmable version: absolute potentiometers / encoders (4–20 mA)
Paint cycle	Epoxy primer and polyurethanic enamel color red RAL 3000 (100 µm final) Different paint cycles available on request.

Dimensions (Atex configuration)

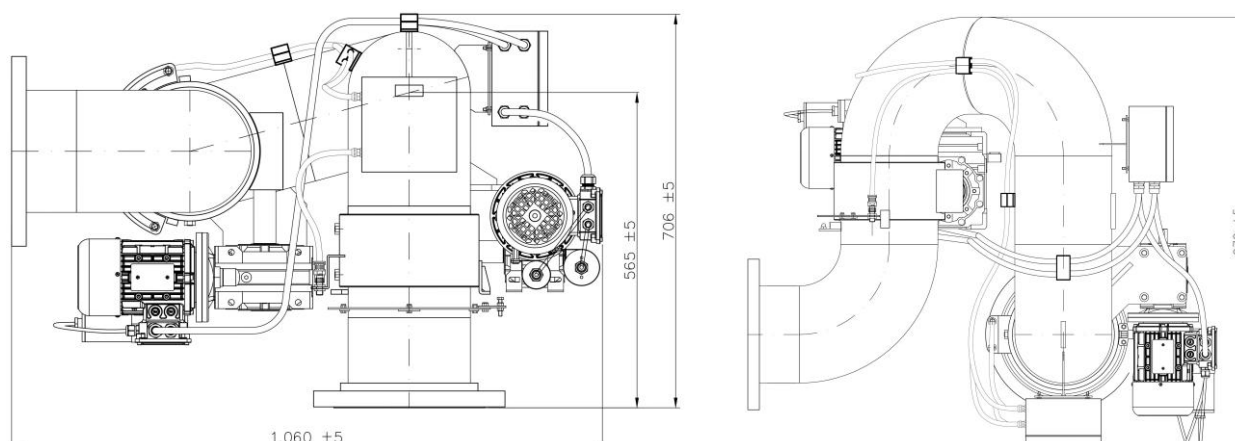


Pressure loss vs. flow rate

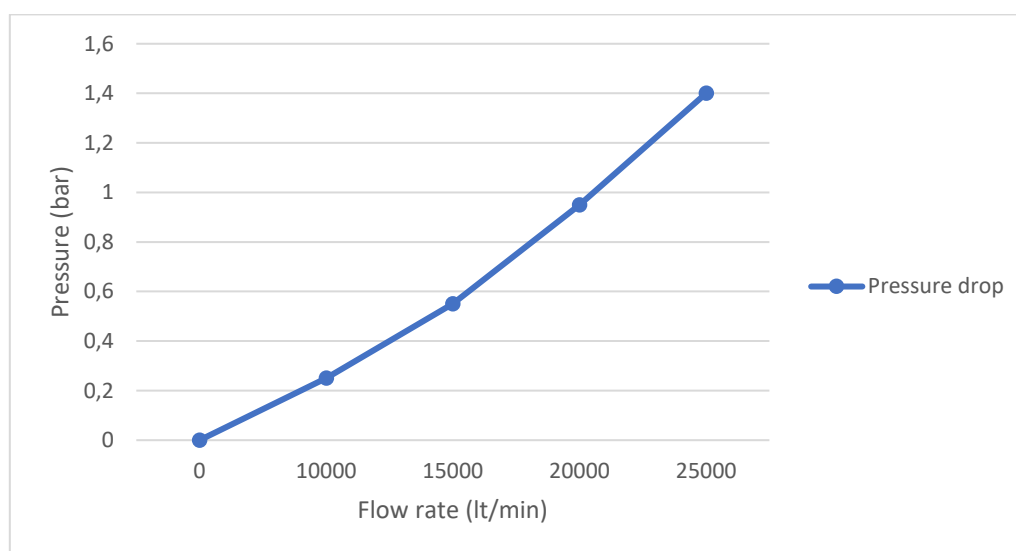

As the flow rate increases, the pressure loss in the monitor also increases. Since the performance data of the monitor / nozzle is based on the pressure at the nozzle, the pressure losses within the monitor body (from the monitor's inlet flange to the outlet connection) must be taken into account during the design phase.

Lenght and height relationship

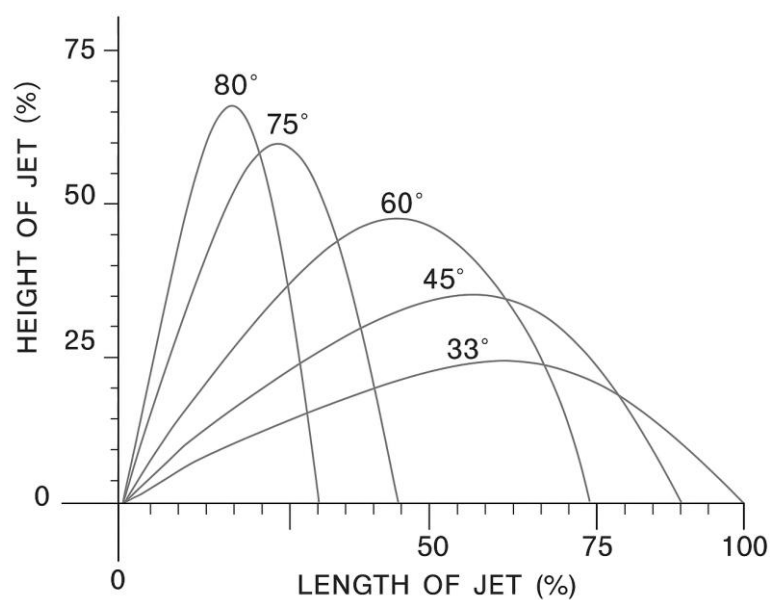

Jet height as a function of throw distance at different monitor elevations.