


Description

The FI-CPF monitor trailer is ideal for ensuring a rapid and flexible emergency response within industrial sites. The trailer is equipped with a housing for a 200-liter foam concentrate drum and is therefore primarily intended for foam discharge by means of a self-aspirating device installed on the monitor.

The trailer features a compact and lightweight frame, suitable for manual handling by a single operator; when fitted with the 200-liter foam drum, it can also be transported by a vehicle thanks to the installed towing eye.

The installed monitor may be manually operated or oscillating and can be equipped with either a nozzle or a self-aspirating foam branchpipe.

Dimensions

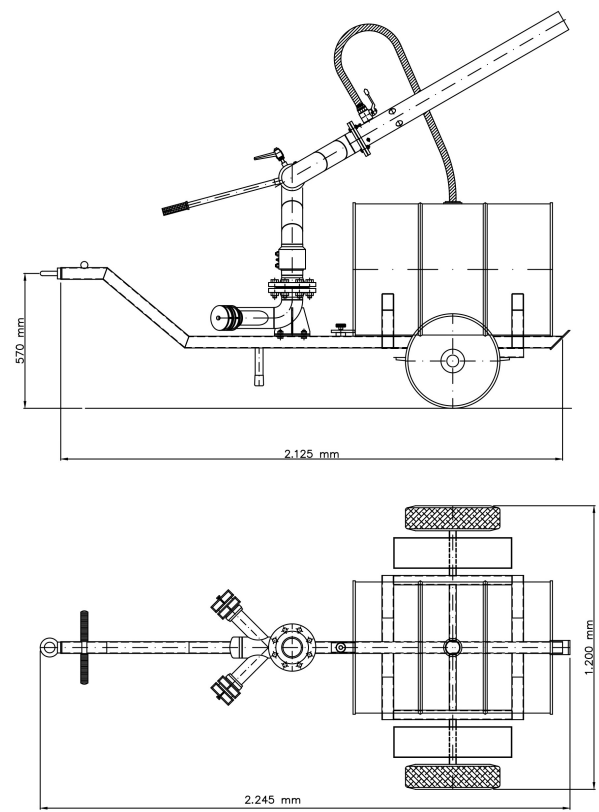

Technical characteristics

Material	Carbon steel painted RAL 3000
Inlet water supply	3" with No. 2 UNI 70 couplings (different types of quick couplings available on request)
Hose storage boxes	No. 2 included, each suitable for housing one 20-metre UNI 70 hose. Larger boxes are available on request.
Maximum supported flow rate	Approx. 1500 lt/min